

SPECIFICATIONS FOR MODEL

SILENTMASTER MD



#S1154AD **120 VOLT**

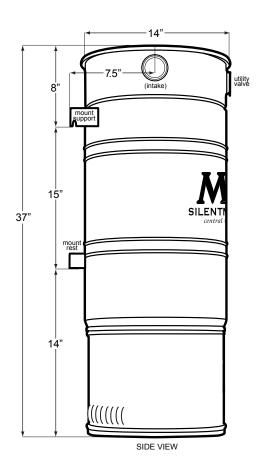

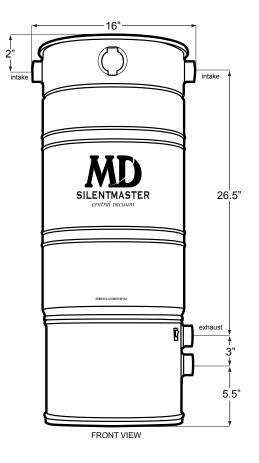

PERFORMANCE

Sealed Vacuum 138.9" CFM 125 Air Watts 557 Volts 120 Amperage 16.8 Quietness 62dBA Coverage 8,000 ft2*

*Recommended home size can be higher or lower when considering these factors: altitude, hours of use, complexity of pipe installation, distance of furthest inlet, noise level, type and size of filtration, and budget.

FEATURES

Motor: Single 2-stage radial bypass motor producing high CFM and waterlift. Filtration: HyperFlow[™] disposable 12-gallon bag. Closed microfilter bag available. Intakes: Right & left intakes. Utility valve. Construction: Durable powder-coated all steel body. Overload: Heat protection resettable minibreaker. Warranty: 12 Years Transferable + Lifetime. Dims/Weight: 14" Diameter, 37" Tall, 42 lbs. All MD accessories and kits are Accessories: compatible and are sold separately.

Air Relief Valve, Mufflers. Optional: Closed bag filtration.

INSTALLATION

Electrical:

120V - 50/60HZ, 20 amp circuit. Separate circuit recommended. 6' Cord with standard plug fits NEMA 5-20R receptacle.

Mounting:

Two-stud 17" wide bracket. Easy to hang and remove. Left/right variable positioning. Mount 6" off ground. Leave 24" above unit.

Venting:

Exterior venting not necessary. 30ft maximum dual line if venting.

PROJECT	LOCATION
DEALER	DATE / PRICE



Designed & Assembled in USA

WWW.BUILTINVACUUM.COM/SILENT-MASTER

M.D. Manufacturing, Inc. 34970 McMurtrev Ave. Bakersfield, CA 93308

800.525.2055 661.283.7550 FAX 661.283.7554